

*Features + Specifications*

**IP65-517024**

**Intended Use:**

- Building interior
- Building exterior

**Construction:**

- Die cast aluminium housing
- Die cast aluminium hinged lens frame
- Silicone gaskets IP65 rated
- Clear tempered glass lens
- Extruded aluminium mounting arm
- All stainless steel fasteners

**Finish:**

- Powder coat paint

**Optical System:**





- Multi-faceted die formed reflector
- Forward flood optics

**Electrical System:**

- HPF magnetic ballast

**Mounting:**

- Pole arm mount

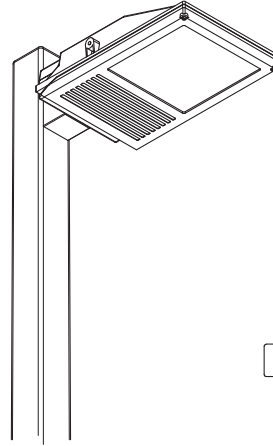

*Product Code Information*

<b>IP65</b>	<b>- 517024</b>	<b>- COLOR</b>	<b>- LAMP</b>	<b>- VOLTAGE</b>
		B=Black	35H=35W HPS	120=120V
		W=White	50H=50W HPS	277*=277V
		A=Aluminum	70H=70W HPS	347*=347V
		G=Grey	10H=100W HPS	
			15H*=150W HPS	
			50M=50W MH	
			70M=70W MH	
			10M=100W MH	
			15M*=150W MH	

Note: \* Consult factory for availability.

Project Name:		Fixture Type:	
QTY:	Product Code:		