

*Features + Specifications*

**IP65-517025**

**Intended Use:**

- Building interior
- Building exterior

**Construction:**

- Die cast aluminium housing
- Die cast aluminium hinged lens frame
- Silicone gaskets IP65 rated
- Clear tempered glass lens
- Extruded aluminium mounting arm
- All stainless steel fasteners

**Finish:**

- Powder coat paint

**Optical System:**





- 120° beam distribution
- Type V square patterns

**Electrical System:**

- Electronic driver, cold temperature rated for LED light source

**Mounting:**

- Pole arm mount

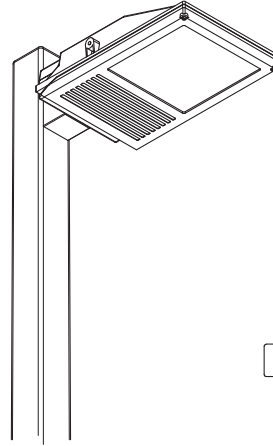

*Product Code Information*

<b>IP65</b>	<b>- 517024</b>	<b>- COLOR</b>	<b>- LAMP</b>	<b>- VOLTAGE</b>
		B=Black	LED 24W	120=120V
		W=White		277*=277V
		A=Aluminum		347*=347V
		G=Grey		

Note: \* Consult factory for availability.

Project Name:		Fixture Type:	
QTY:	Product Code:		