

*Features + Specifications*



**IP53-600545**

**Intended Use:**

- Building interior/exterior
- **Ø5"** Ceiling recessed mount
- Approved for IC and AT application
- Damp location listed

**Construction:**

- Trim made from extruded/machined aluminium
- Body and heat sink made from extruded aluminium
- Recessed housing made from sheet metal

**Finish (LED Light Module):**



- Powder coat paint
- Polished chrome plated

**Optical System:**

- High power LED 50000+ hrs rated
- 3000K or 5000K CCT with 80+ CRI
- Precision made optical lens
- Standard **45°** symmetrical light distribution
- Special 8°, 15°, 30°, 45° & 60° available\*
- Up to 45° tilt adjustment with 350° rotation

**Electrical System:**

- Electronic driver
- Dimmable driver available
- RoHS compliant
- Short circuit and overheat protected
- Housing approved for feed thru application

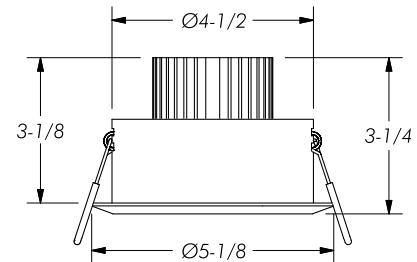

*Product Code Information*

<b>IP53 - 600545 - TRIM COLOR -</b>	<b>LAMP</b>	<b>- VOLTAGE -</b>	<b>DRIVER</b>
W=White	18W3K=630 lm, 3000K	120=120V	S=Standard
B=Black	18W5K=900 lm, 5000K	277*=277V	D1*=120V dimming
A=Aluminum		347*=347V	
C=Chrome			

Note: \* Consult factory for availability and application restrictions.

Project Name:		Fixture Type:	
QTY:	Product Code:		

**(use with recessed housing number IP00-600050)**