

Features + Specifications



IP53-600645

Intended Use:

- Building interior/exterior
- **Ø6"** Ceiling recessed mount
- Approved for IC and AT application
- Damp location listed

Construction:

- Trim made from extruded/machined aluminium
- Body and heat sink made from extruded aluminium
- Recessed housing made from sheet metal

Finish (LED Light Module):



- Powder coat paint
- Polished chrome plated

Optical System:

- High power LED 50000+ hrs rated
- 3000K or 5000K CCT with 80+ CRI
- Precision made optical lens
- Standard **45°** symmetrical light distribution
- Special 60° available*
- Semi-Specular Alzak cone for glare control (white and black cone also available)

Electrical System:

- Electronic driver
- Dimmable driver available
- RoHS compliant
- Short circuit and overheat protected
- Housing approved for feed thru application

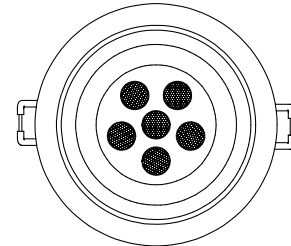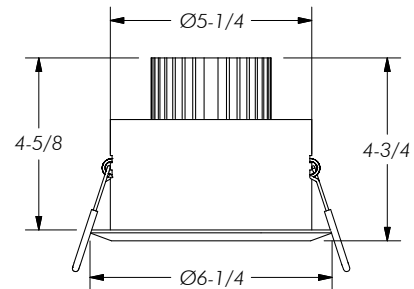

Product Code Information

IP53 - 600645 -	OPTIC	TRIM	LAMP	VOLT.	DRIVER
AC=Alzak cone	W=White		18W3K=630 lm, 3000K	120=120V	S=Standard
WC=White cone	B=Black		18W5K=900 lm, 5000K	277*=277V	D1*=120V dimming
BC=Black cone	A=Aluminum			347*=347V	D10*=0-10V dimming
	C=Chrome				

Note: * Consult factory for availability and application restrictions.

Project Name:		Fixture Type:	
QTY:	Product Code:		

(use with recessed housing number IP00-600060)