

*Features + Specifications*



**IP53-601545R27**

**Intended Use:**

- Building interior
- **Ø5"** Ceiling recessed mount
- Approved for IC and AT application
- Damp location listed

**Construction:**

- Trim made from extruded/machined aluminum
- Body and heat sink made from extruded aluminum
- Recessed housing made from sheet metal


**Finish (LED Light Module):**

- Anodized aluminum (A)
- Powder coat paint (W, B)
- Polished chrome plated (C)



**Optical System:**

- High power LED 50000+ hrs L70 rating
- ① **2700K CCT with 80+ CRI**
- Precision made optical lens
- Standard **45°** symmetrical light distribution
- Special 8°, 15°, 30°, 60° distribution also available\*
- Semi-Specular Alzak cone for glare control (white cone and black cone also available)
- Unique no tool installation

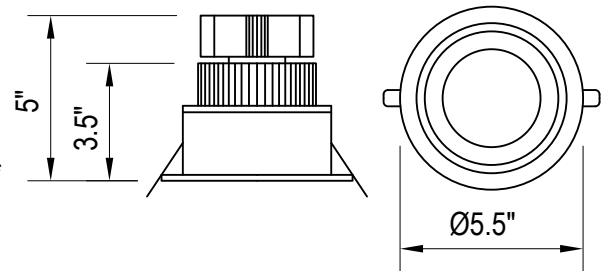

**Electrical System:**

- ③ • Electronic dimmable driver standard
- RoHS compliant
- Short circuit and overheat protected
- Housing approved for feed thru application

LAMP INFO TABLE

Lamp Code	Rated Lumens	Preceived Lumens
18W 2700K	630	945

*Product Code Information*

**IP53 - 601545R27 - OPTIC - TRIM - LAMP - VOLT**

② **AC=Alzak cone** W=White 18W 120=120V  
 WC=White cone B=Black  
 BC=Black cone **A=Aluminum** ②  
 C=Chrome

- ① Similar to Halogen lamp color
- ② RPS - RaPid Shipping
- ③ Operates well with most dimmers (leading edge or trailing edge)  
 -use ELV type dimmers for optimum dimming performance

Note: \* Consult factory for availability and application restrictions.

Project Name:		Fixture Type:	
QTY:	Product Code:		

**(use with recessed housing number IP00-600050)**