

Features + Specifications



IP54-601539R27

Intended Use:

- Building interior/exterior
- **Ø5"** Ceiling recessed mount
- Approved for IC and AT application
- Wet location listed

Construction:


- Trim made from extruded/machined aluminum
- Body and heat sink made from extruded aluminum
- Recessed housing made from sheet metal

Finish (LED Light Module):

- Anodized aluminum (A)
- Powder coat paint (W, B)
- Polished chrome plated (C)

Optical System:

- High power LED 50000+ hrs L70 rating
- ① • **2700K CCT with 80+ CRI**
- Precision made optical lens
- Standard **60°** symmetrical light distribution
- Semi-Specular Alzak cone for glare control
- Bottom frosted lens with gasket for wet location use
- Unique no tool installation

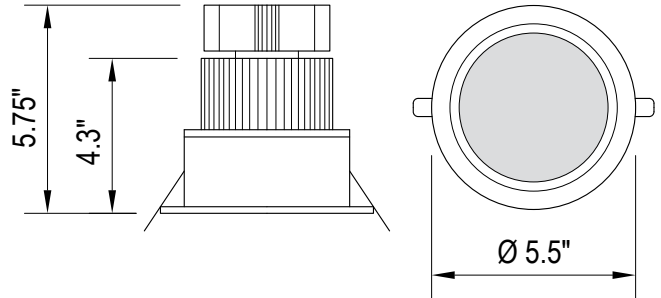

Electrical System:

- ③ • Electronic dimmable driver standard
- RoHS compliant
- Short circuit and overheat protected
- Housing approved for feed thru application

LAMP INFO TABLE (with bottom lens)

Lamp Code	Rated Lumens	Preceived Lumens
18W 2700K	560	840

Product Code Information

IP54 - 601539R27 - LAC - TRIM - LAMP - VOLT

Lensed Alzak Cone W=White 18W 120=120V

B=Black
A=Aluminum ②
 C=Chrome

- ① Similar to Halogen lamp color
- ② RPS - RaPid Shipping
- ③ Operates well with most dimmers (leading edge or trailing edge)
 -use ELV type dimmers for optimum dimming performance

Note: * Consult factory for availability and application restrictions.

Project Name:		Fixture Type:	
QTY:	Product Code:		

(use with recessed housing number IP00-600050)