

Project:	Type:	QTY:
Product Code:		

Product Code

IP43 - 901001 -	COLOR	-	VOLTAGE
	3K=3000K		DC12=12V, DC
	6K=6000K		
	R =Red		
	G =Green		
	B =Blue		
	Y =Yellow		

Features + Specifications

Intended Use:

- Building interior

Construction:

- Flexible strip circuit board

Finish:

- Circuit board is white

Optical System:

- Premium grade high brightness, low power 1210 SMD LEDs
- 90+ CRI with 30,000 hours life rating
- 120° beam spread provides 900 lumens per meter
- Great for continuous cove lighting without hot spots
- Ideal for under shelves/cabinets application
- Wide operating temperature range -30°C to +60°C

Electrical System:



- Each 3 LEDs are on its own current limiting circuit
- Can be trimmed at each 3 LEDs interval (25mm)
- Maximum length 5M per circuit
- 19.2W per meter = 5.8W per foot at 12V DC operating voltage
- Common anode technology

Mounting:

- Self adhesive back on strips
- Installed over smooth surface free of dirt, oil and moisture

Power Supplies (sold separately):

- Various wattage, dimmable & non-dimming types
- 277V and 347V power supplies also available (please consult factory)

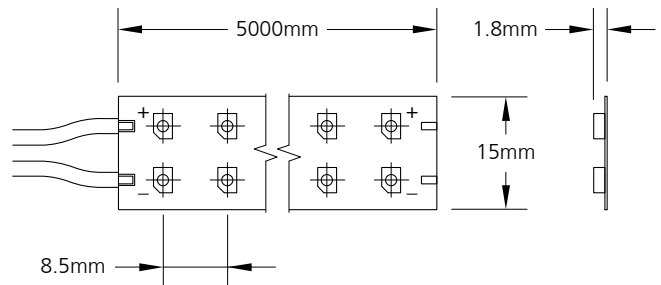

Certified to CSA C22.2 No.250.0 Conformed to UL 1598

Certification Marks (where applicable) will be found on our luminaires and its components



www.iplighting.com

