

Project:

Type:

QTY:

Product Code:

Ø9" OD

Product Code

IP54 - RFL240SM

COLOR

☒ W = White

LED DATA

☒ 5CCT = CCT selectable

VOLTAGE

☒ 120 = 120V

Features + Specifications

Intended Use:

- Building interior, protected exterior
- Wet location listed, ceiling mount

Construction:

- White PMMA injection body ring
- Main core is of metal construction for effective heat management
- Lightly stippled opal lens smooths out LED diodes image
- Twist and turn to lock mounting bracket
- No visible screws after installation

Finish:

- White PMMA injection

Optical System:

- Multiple 2835 LEDs DOB light module
- Light module mounted to metal main core for effective heat management
- 90CRI, 5 CCT selectable (2700K, 3000K, 3500K, 4000K, 5000K), 18W
- CCT selectable is 83+lm per watt, min. 1400lm @ 3000K CCT
- Lightly stippled opal lens spread light evenly
- Life rating of 50000 hrs

IP54-RFL240SM


Electrical System:

- HPF high efficiency driver on board design
- Low THD, short circuit and overheat protected
- 18W system watt for 5CCT selectable
- 120V line dimmable
- RoHS compliant

Mounting:

- PMMA injection mounting bracket mounts to 4" outlet box
- Line up fixture to bracket, push up, twist and turn to lock
- No visible screws after installation

Dimensions:

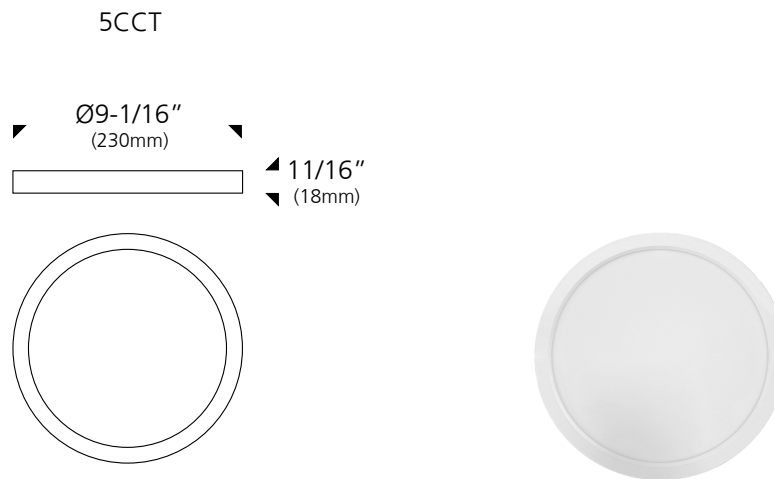

Related models:

