

Project:	Type:	QTY:
Product Code:		

Product Code

IP65 - 206633

TRIM COLOR

- ☐ B* = Black
☐ W = White
☐ A = Aluminum
☐ CC = Custom Color

SIZE+WATT

- ☐ S1 - 5W
☐ S2 - 10W

LED DATA

- ☐ 927 = 2700K, 90CRI
☐ 930 = 3000K, 90CRI
☐ 840 = 4000K, 80CRI

VOLTAGE

- ☒ 120 = 120V

OPTION

- ☐ NTS = Anti-step

Note: * Components usually in stock for quick assembly.

Features + Specifications

Intended Use:

- Building interior
- Building exterior
- Wet location listed

APERTURE LUMENS

	2700K (927)	3000K (930)	4000K (840)
5W	650	675	710
10W	1090	1150	1255

Construction:


- 2 Sizes square body, S1=118mm sq., S2=200mm sq.
- Die-cast aluminum one-piece body with asymmetrical light well
- Shallow light well slope >70° to prevent foot insertion
- Hi impact glass lens, lightly frosted to reduce LED diode sharpness
- Entire light engine compartment sealed off to prevent water and dust ingress
- Closed cell gasket where body meets wall surface for better seal against moisture (direct contact of power washer nozzle washdown NOT recommended)

Finish:

- Sand textured powder coat paint with UV additive
- Color in Black, white and Aluminum
- Custom color available, please contact factory for more details

Optical System:

- Multiple mid-power LEDs linear 5W & 10W light module
- LEDs on all aluminum PCB for excellent heat management
- Osram Duris 2835 SMDs 2700K, 3000K & 4000K, 80/90 CRI
- Check Osram web portal for their latest LM80, LM70 and TM21 technical data

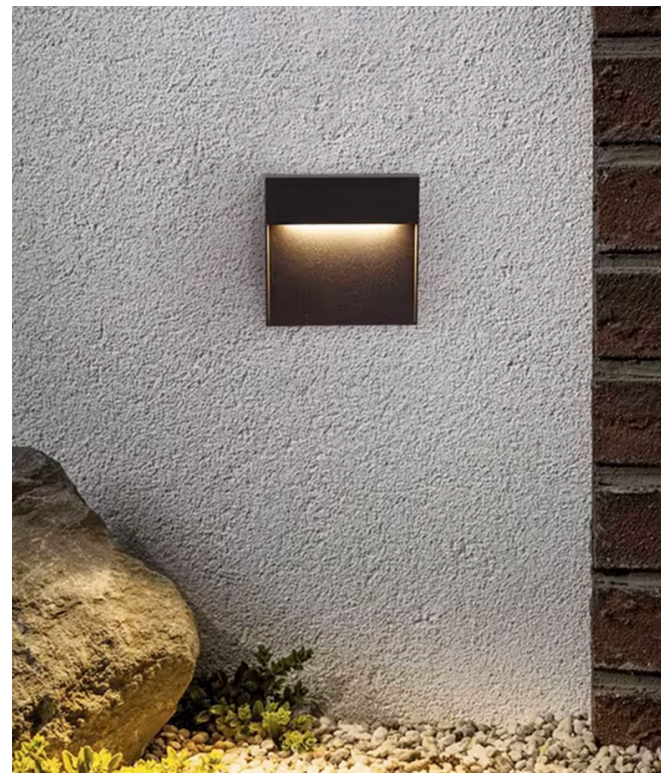

IP65-206633



Electrical System:

- Constant current drive technology
- High efficiency, low THD, RoHS compliant
- System watt 5W for S1 and 10W for S2 @ 120V AC
- Overheat with short circuit protection
- 120V, line dimmable with most wall box dimmers

Mounting:

- Mounts over 4" deep octagon box (2.5" deep minimum)

Dimensions:

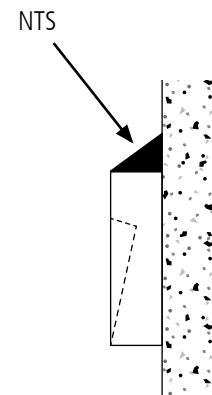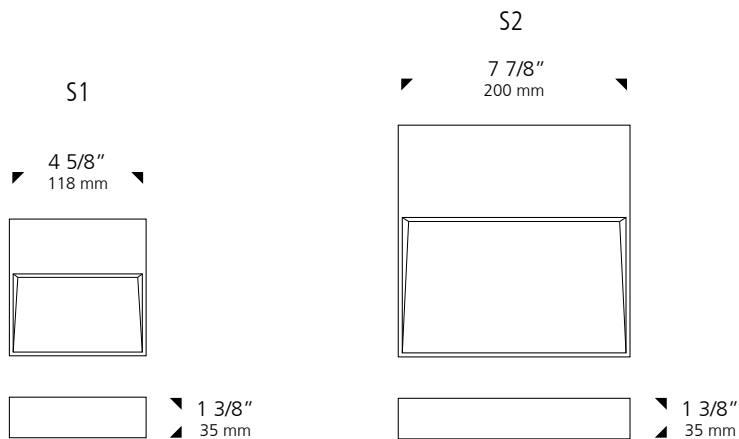

Right reserved for material and spec modification without prior notice

Datocode 20260703